



SPC-1500

Gasdruckfeder Speed Control




8

Grün
Blau
Rot
Gelb
Schwarz





T: < 80 °C

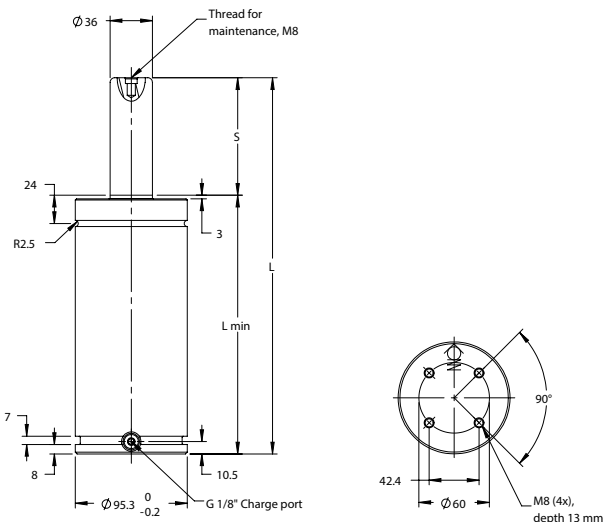

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
125	370	245	1500	1900	7.60	0.73	SPC-1500-125
160	440	280	1500	1900	8.45	0.91	SPC-1500-160
200	520	320	1500	1900	9.43	1.11	SPC-1500-200
250	620	370	1500	1900	10.64	1.36	SPC-1500-250
300	720	420	1500	1900	11.86	1.62	SPC-1500-300

Einbauvarianten

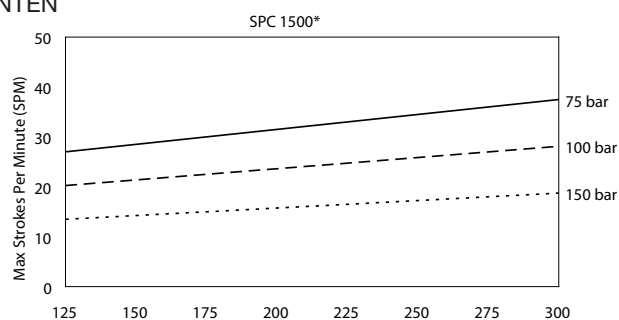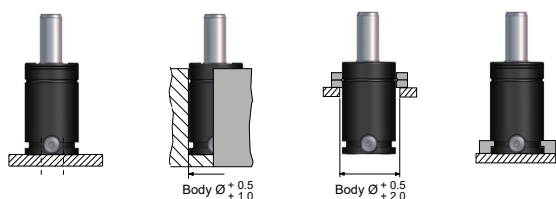

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 14 - 36
Instandhaltungsset	3421494