



XG-2400


Gasdruckfeder Power Line



Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

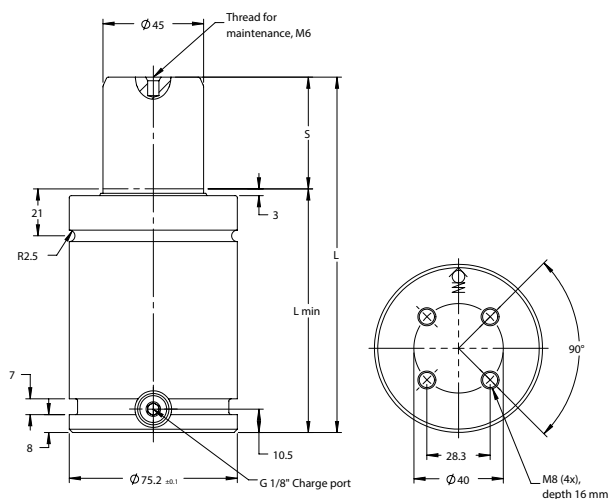

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
16	91	75	2400	3830	1.77	0.090	XG-2400-16
19	97	78	2400	3850	1.82	0.10	XG-2400-19
25	109	84	2400	3870	1.89	0.13	XG-2400-25
32	123	91	2400	3860	2.00	0.16	XG-2400-32
38	135	97	2400	3840	2.10	0.18	XG-2400-38
50	159	109	2400	3920	2.28	0.23	XG-2400-50
63	185	122	2400	3920	2.56	0.28	XG-2400-63
75	209	134	2400	3920	2.75	0.33	XG-2400-75
80	219	139	2400	3920	2.83	0.35	XG-2400-80
100	259	159	2400	3930	3.15	0.43	XG-2400-100
125	309	184	2400	3930	3.54	0.54	XG-2400-125

EINBAUVARIANTEN

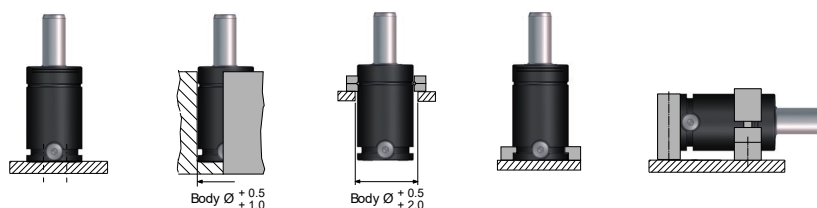

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 40 - 100
Instandhaltungsset	3018848