

**XF-750**

Gasdruckfeder




8

Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

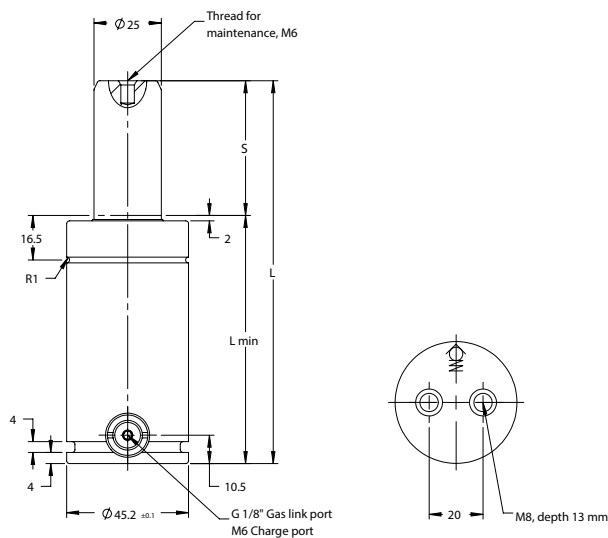 $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	62	52	740	1210	0.47	0.020	XF-750-10
13	68	55	740	1210	0.49	0.020	XF-750-13
16	74	52	740	1210	0.51	0.030	XF-750-16
19	80	61	740	1170	0.51	0.030	XF-750-19
25	92	67	740	1180	0.55	0.040	XF-750-25
32	106	74	740	1180	0.60	0.050	XF-750-32
38	118	80	740	1180	0.64	0.050	XF-750-38
50	142	92	740	1180	0.71	0.070	XF-750-50
63	168	105	740	1180	0.79	0.090	XF-750-63
75	192	117	740	1190	0.87	0.10	XF-750-75
80	202	122	740	1190	0.90	0.11	XF-750-80
100	242	142	740	1190	1.03	0.13	XF-750-100
125	292	167	740	1190	1.19	0.17	XF-750-125

EINBAUVARIANTEN

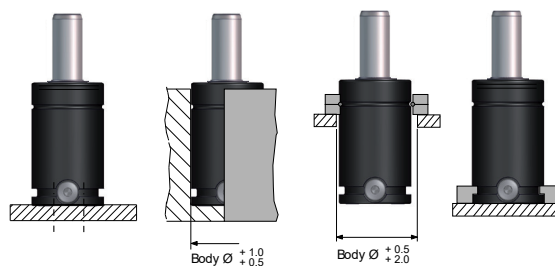

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 50 - 100
Instandhaltungsset	3019903