




SN2811-C-1250

Gasdruckfeder Extra Power

Gas spring Extra Power

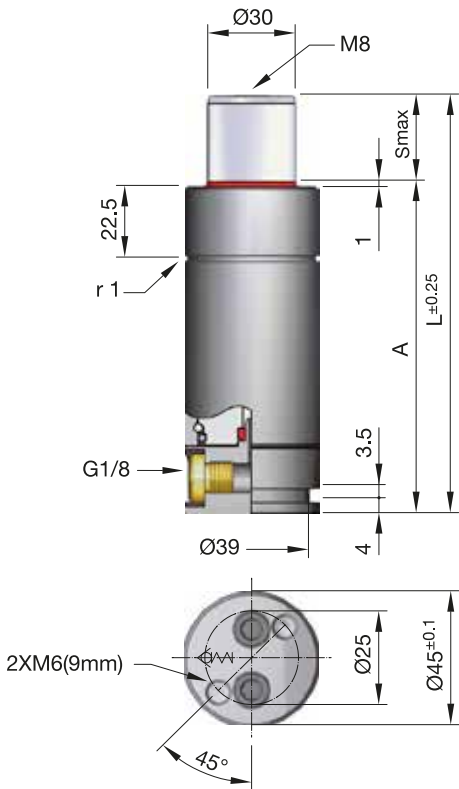


max 80° C



S	A	L	bar	daN1	daN2	Fa	kg	V (l)	Order No.
12	87	99	175	1250 (± 5%)	1740	7.07	0.82	0.029	SN2811-C-1250-12
25	100	125	175	1250 (± 5%)	1970	7.07	0.95	0.047	SN2811-C-1250-25
38	117	155	175	1250 (± 5%)	2005	7.07	1.03	0.070	SN2811-C-1250-38
50	130	180	175	1250 (± 5%)	2070	7.07	1.15	0.088	SN2811-C-1250-50
63	147	210	175	1250 (± 5%)	2075	7.07	1.30	0.110	SN2811-C-1250-63
80	170	250	175	1250 (± 5%)	2020	7.07	1.27	0.146	SN2811-C-1250-80

EINBAUVARIANTEN/INSTALLATION VARIANTS

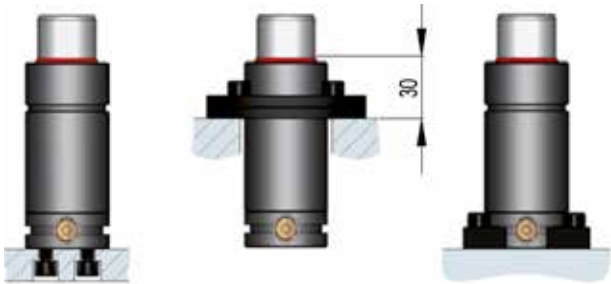



SN2811-C-1250

Gasdruckfeder Extra Power

Gas spring Extra Power

8

Druckmedium	Pressure medium	N2
Max. Fülldruck	Max. filling pressure	175 bar
Min. Fülldruck	Min. filling pressure	35 bar
Max. Betriebstemperatur	Max. working temperature	80 °C
Temperaturabhängige Druckerhöhung	Pressure increase due to temperature	0,33 %/1 °C
Instandhaltungsset	Maintenance kit	SN2990-HC1250
Max. Kolbengeschwindigkeit	Max. piston speed	25 m/min

