



MT-300


Gasdruckfeder High Temperature



Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

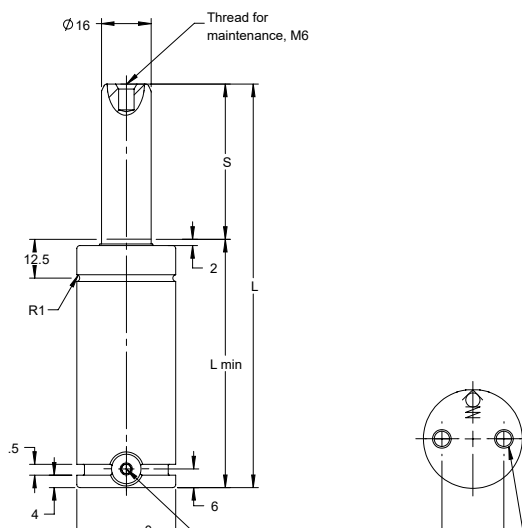

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	50	40	300	491.7	0.17	0.010	MT-300-10
13	56	43	300	433.3	0.17	0.010	MT-300-13
16	62	46	300	441.7	0.19	0.010	MT-300-16
19	68	49	300	466.7	0.20	0.010	MT-300-19
25	80	55	300	458.3	0.21	0.020	MT-300-25
32	94	62	300	458.3	0.23	0.020	MT-300-32
38	106	68	300	458.3	0.25	0.030	MT-300-38
50	130	80	300	466.7	0.29	0.030	MT-300-50
63	156	93	300	458.3	0.33	0.040	MT-300-63
75	180	105	300	458.3	0.36	0.050	MT-300-75
80	190	110	300	458.3	0.38	0.050	MT-300-80

EINBAUVARIANTEN

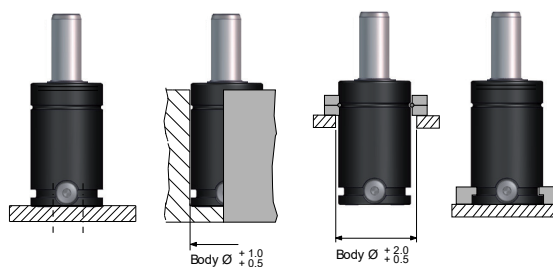

Druckmedium	N2
Max. Fülldruck (bei 20° C)	115 - 150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 120° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,0 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 10 - 20
Instandhaltungsset	3022687