

**XG-1500**


Gasdruckfeder Power Line



Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

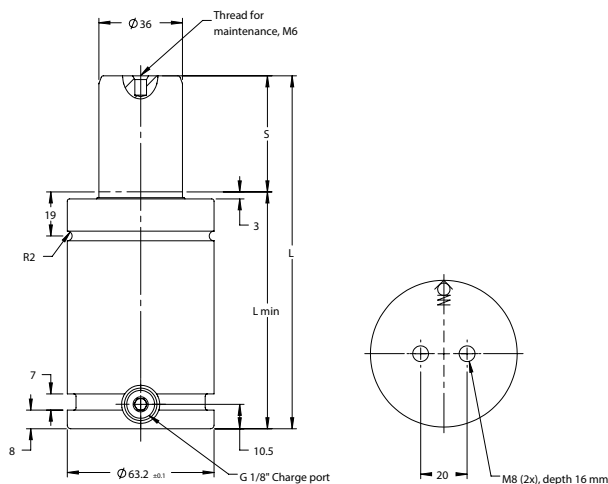

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
13	78	65	1500	2400	0.90	0.050	XG-1500-13
16	84	68	1500	2410	0.90	0.060	XG-1500-16
19	90	71	1500	2420	1.00	0.070	XG-1500-19
25	102	77	1500	2430	1.00	0.080	XG-1500-25
32	116	84	1500	2380	1.10	0.11	XG-1500-32
38	128	90	1500	2390	1.20	0.12	XG-1500-38
50	152	102	1500	2400	1.3	0.15	XG-1500-50
63	178	115	1500	2410	1.40	0.19	XG-1500-63
75	202	127	1500	2420	1.40	0.22	XG-1500-75
80	212	132	1500	2420	1.40	0.24	XG-1500-80
100	252	152	1500	2430	1.90	0.29	XG-1500-100
125	302	177	1500	2430	2.20	0.36	XG-1500-125

EINBAUVARIANTEN

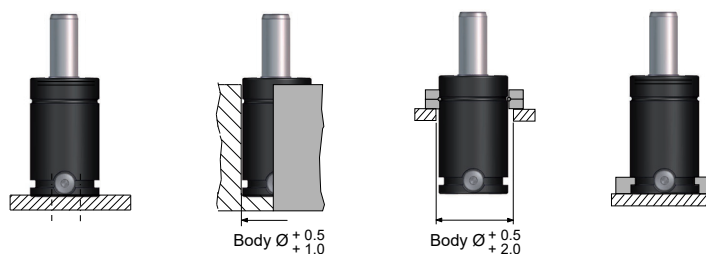

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 50 - 100
Instandhaltungsset	3020434