




X-6600

Gasdruckfeder Power Line



8

Grün
Blau
Rot
Gelb
Schwarz

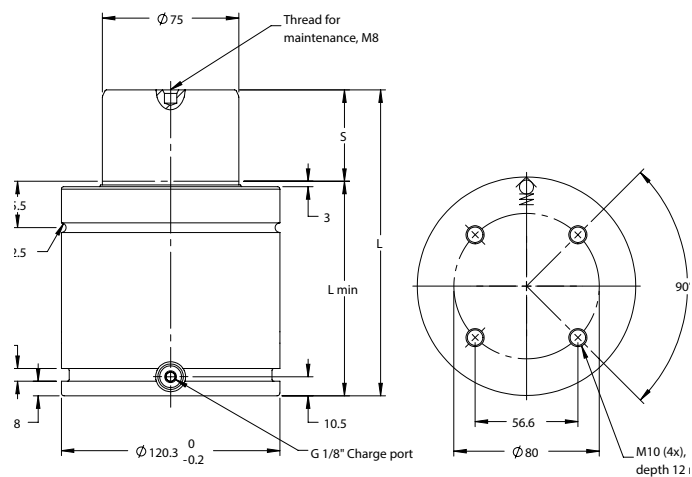


Norm: VDI 3003
T: < 80 °C

 $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
16	100	84	6630	8900	5.00	0.32	X-6600-16
19	106	87	6630	9100	5.11	0.35	X-6600-19
25	118	93	6630	9390	5.34	0.42	X-6600-25
32	132	100	6630	9610	5.61	0.49	X-6600-32
38	144	106	6630	9820	5.84	0.56	X-6600-38
50	168	118	6630	10060	6.31	0.69	X-6600-50
63	194	131	6630	10240	6.81	0.83	X-6600-63
75	218	143	6630	10340	7.27	0.90	X-6600-75
80	228	148	6630	10410	7.46	1.01	X-6600-80
100	268	168	6630	10540	8.23	1.23	X-6600-100
125	318	193	6630	10650	9.19	1.50	X-6600-125

EINBAUVARIANTEN

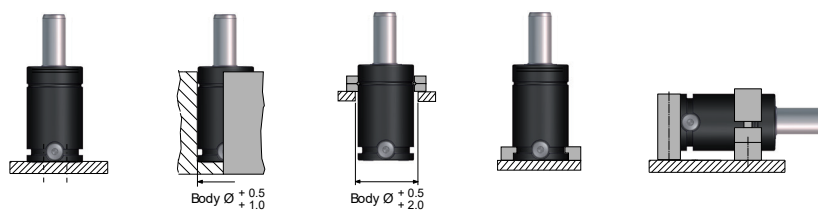

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 30 - 100
Instandhaltungsset	3019912